


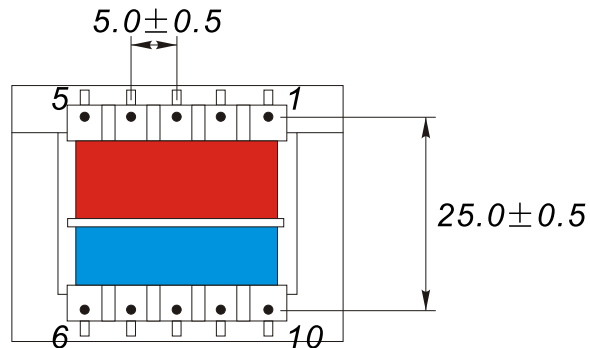


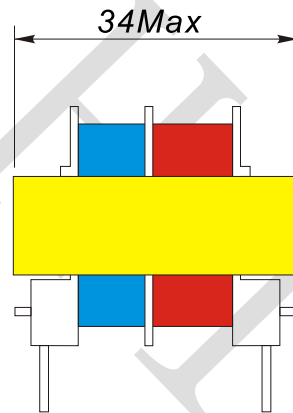

1. PHYSICAL CHARACTERISTICS (mm)

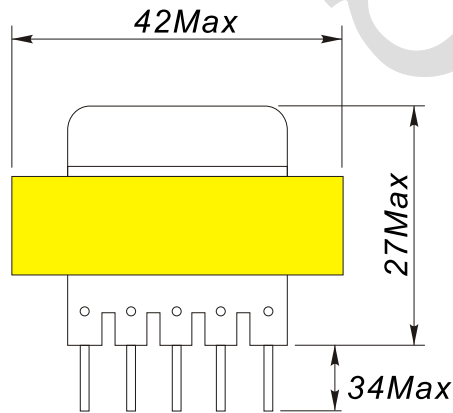

2. ELECTRONICAL SCHEMATIC

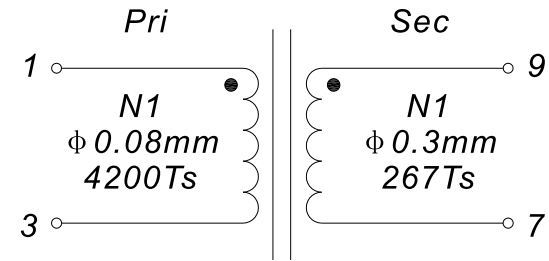

3. ELECTRONICAL SPECIFICATIONS

Pri: 230V, 50Hz, 35mA Max

Sec: Full Load voltage: 10Vac ± 5% @ 500mA

No load voltage: 15Vac

DCR: Pri: 1000Ω ± 15%

Sec: 4.65Ω ± 15%

Insulation resistance: 100MΩ, DC500V

Isolation voltage: Pri to Sec: 4000VAC, 5mA, 2S

Pri to Core: 4000VAC, 5mA, 2S

Sec to Core: 500VAC, 5mA, 2S

Test Instrument:

L: HP4284A

RDC: HM2540

NOTES:

Temp 20°C 48%RH
RoHS Compliant

NAME:	Transformer		
CUSTOMER P/N:		DATE:	2011-07-15
SHINHOM P/N:	LPT4112-230-10	REV: A0	PAGE
DRAWN BY	CHECKED BY	APPROVE BY	



SHINHOM
SHAANXISHINHOM ENTERPRISE CO LTD

The Document property belong to SHINHOM & is not allowed to be duplicated without authorization